


2000LBS ENGINE STAND

Heavy-duty steel frame construction 360° rotating head lock in 6 positions, disassembles quickly and easily for storage and transportation.

CAUTION

1. Do not exceed the maximum capacity of 2000lbs.
2. Use only on hard level surface.
3. Never attempt to move loaded stand across floors having cracks or other obstacles which might impede movement of wheels.
4. Never work directly under a supported engine.
5. Be sure load and stand are stable.
6. Periodically inspect stand to ensure its safe operation.
7. Failure to follow any of these instructions may result in property damage and/or personal injury.

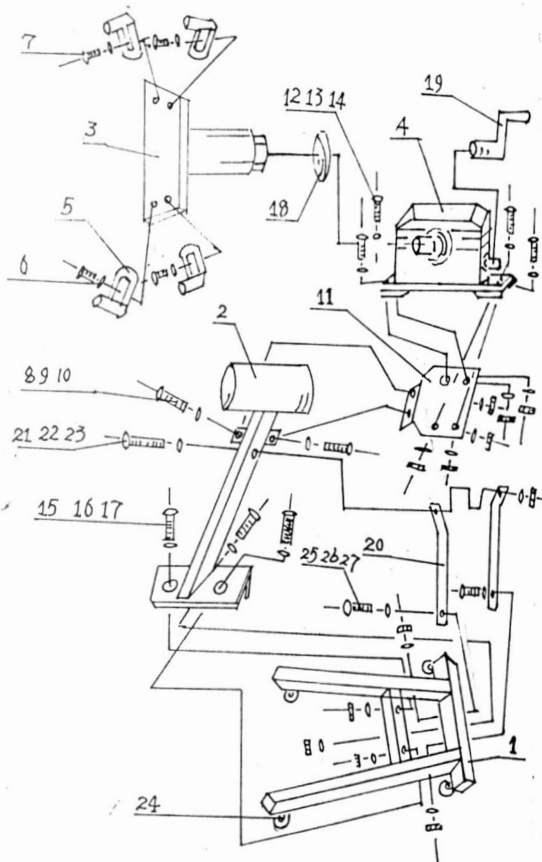

Number	Name	Quantity
1.	Rear Gross Beam	1
2.	Vertical column	1
3.	Turning plate	1
4.	ASS'y to slower speed	1
5.	Shifting stand	4
6.	Spring Washer $\phi 14$	4
7.	Bolt M 14 $\times$ 60	4
8.	Bolt M 10 $\times$ 25	2
9.	Spring Washer $\phi 10$	2
10.	Nut M10	2
11.	Table	1
12.	Bolt M8 $\times$ 35	4
13.	Spring Washer $\phi 8$	4
14.	Nut M8	4
15.	Bolt M14 $\times$ 80	3
16.	Nut M14	3
17.	Spring Washer $\phi 14$	3
18.	Nut	1
19.	Handle	1
20.	Support	2
21.	Bolt M10 $\times$ 90	1
22.	Spring Washer $\phi 10$	1
23.	Nut M10	1
24.	3" Universal Wheel	4
25.	Bolt M10 $\times$ 75	2
26.	Spring Washer $\phi 10$	2
27.	Nut M10	2