
USER INSTRUCTION

KNEE KICKER

Item No. 19665

Specifications

Extended length of product range: 470-610mm

Head Dimensions: 130mm(L)×125(W)

Maximum Pin Extension: 9mm

Safety Precautions

When using this tool, basic safety precautions should always be followed to reduce the risk of personal injury and damage to equipment.

WARNING: THE TEETH AND PINS ARE SHARP AND COULD CAUSE INJURY WHEN NOT IN USE. ENSURE PROTECTIVE COVER IS SECURELY FIXED WHEN NOT IN USE.

Read all instructions before using this tool.


1. Keep work area clean and tidy
2. Do not use tools in damp or wet locations. Do not expose to rain. Keep work area well lit.
3. Children must never be allowed in the work area.
4. When not in use, tools must be stored in a dry location to help prevent rust. Always lock up tools and keep out of reach of children.
5. Do not modify this tool and do not use this tool for a purpose for which it was not intended. Improper use of the tool can result in damage and personal injury. If there is any question on how to use this tool properly, enlist the help of an experienced professional. This tool is NOT intended for carpet stretching.
6. Do not wear loose clothing or jewellery as they can be caught whilst working. Protective, electrically non-conductive clothes and non-skid footwear are recommended when working. Wear restrictive hair covering to contain long hair.
7. Always wear safety goggles.
8. Before using any tools, inspect them. Any part that appears damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for alignment and binding of moving parts; any broken parts or mounting fixtures; properly tightened Grip Pads (6); and any other condition that may affect proper operation. Any part that is damaged should be properly repaired or replaced by a qualified technician

Operation

Refer to **FIGURE 1** and **FIGURE 2**

1. Squeeze both of the adjustment buttons on the sides of the Handle (2), and adjust the handle (2) to the proper length of your application. Release the adjustment buttons and lock the Handle (2) into place.

FIGURE 1

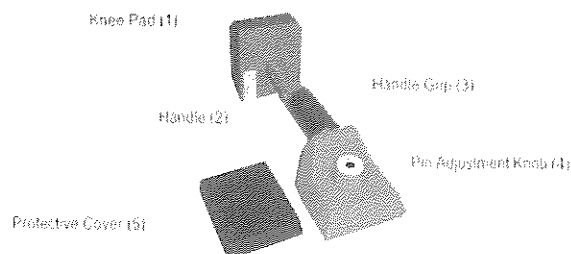

2. Remove the Protective Cover (5).


3. Turn the Pin Adjustment Knob (4) to the proper length

for the carpet you are working with. The Pin Adjustment has 7 settings. The lower numbers indicate shorter Pin lengths and the higher numbers indicate for longer Pin lengths. Turn the Pin Adjustment

Knob (4) clockwise to decrease Pin length and counter-clockwise to increase Pin length.

Note: The Pin length must allow the Pins to pass through the top of the carpet (pile) and grip into the cloth-like backing. The Pins must not go through the backing into the pad or they will damage the pad. This tool is not to be used for stretching carpet; it is only to be used as an aid for locating the carpet on the tack strips located around the perimeter of the room.

FIGURE 2

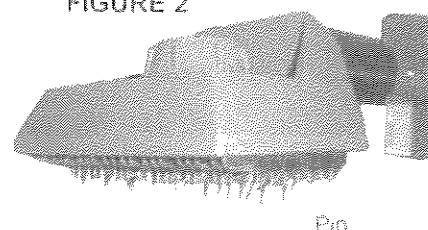


Note: **FIGURE 2** shows the Pins fully extended at 9mm.

4. Position the Carpet installer next to the tack strips with the pins properly inserted through the carpet and into the backing. Push your Knee against the Knee Pad (1) to move the carpet forward onto the tack strips. Carefully press the carpet down onto the tack strip to secure. Then continue along the perimeter of the room securing the carpet.

****** When you are finished, use the Pin Adjustment Knob (4) to fully retract the Pins and snap on the Protective Cover (5). The Protective Cover (5) only fits on one way. Rotate it until it fits properly.

FIGURE 3



****** When not in use, you should replace the Protective Cover (5) to cover the pins and ensure safety. Refer to the picture for the correct position of The Protective Cover (5). The Nicks on the Protective Cover (5) should be placed facing to the handle.

Care and Maintenance

1. Keep the Carpet Installer clean. Remove any dirt or debris from the Pins and Grip Pads.
2. When the Grip Pads (6) need replacing, remove the two cross-head screws that hold the Grip Pad (6) in place and install a new Grip Pad (6). Replace the screws. See **FIGURE 4**.

Note: Always verify that the Grip Pads (6) are securely fastened before each use.

3. Never use oil on the pins or grip pads as this may discolour or stain the carpet.

FIGURE 4

